

SUBMITTAL RECORD

JOB _____
LOCATION _____
SUBMITTED TO _____
SUBMITTAL PREPARED BY _____
APPROVED BY _____
DATE _____



Submittal Form 45° Eyelets & Cable Assembly

DESCRIPTION

Rize 45° eyelets are manufactured of zinc plated cold rolled steel and swaged to the wire rope cable with a hydraulic press. 45° eyelet assemblies are available for installation with either a 1/4 in. or 3/8 in. fastener. They are also available both in 90° and straight assemblies, and as a kit with the appropriate cable lock.

For ordering information, see reverse side.

WARNINGS

ALWAYS CONFIRM ENGAGEMENT OF CABLE LOCK ON WIRE BEFORE APPLYING THE LOAD: By pushing the adjustment pin in the opposite direction of the arrows on the cable lock and then pulling the cable also in the opposite direction of the arrows on the cable lock.

PULL ADJUSTMENT PIN BACK AND PASS WIRE ROPE THROUGH RIZE CABLE LOCK: Failure to pull adjustment pin first may cause damage to serrated teeth and reduce holding capacity.

TO ENSURE HANGING SYSTEM INTEGRITY AND SAFETY: Use only Rize wire rope.

WORKING LOAD LIMIT (WLL) MUST FALL WITHIN THE STATED WORKING LOAD RANGE OF THE CABLE LOCK: Each product is load rated and incorporates a minimum safety factor of 5:1. This WLL takes into account the specification criteria of the Rize Cable Lock and the wire rope.

DO NOT USE ON COATED WIRE ROPE: It is important to maintain the metal to metal contact between the locking pawls in the Kwik-Loc and the wire rope.

SPRAY PAINTING: of the Rize Suspension Hanging System after installation is acceptable, at the installing contractor's discretion, **if** the installing contractor physically confirms engagement of each cable lock on the cable prior to and after painting, and in strict accordance with the Rize Installation Instructions. Brush painting is not acceptable. Do not paint Cable or Cable Lock prior to installation. Do not reposition Cable Lock after painting.

DO NOT APPLY LUBRICANT: to any part of the assembly as this will alter the surface nature of the wire rope and attract dirt and debris.

DO NOT USE FOR LIFTING: (Under Hook slings) This product is designed for static load applications only.

KEEP THE PRODUCT CLEAN AND FREE FROM DIRT: Any dirt should be removed from the product prior to assembly.

INSPECT PERIODICALLY: Upon inspection, discard and replace if worn, distorted, or damaged.

REMOVE DAMAGED WIRE ENDS: Using a designated pair of wire rope cutters prior to inserting into the Rize Kwik-Loc.

WHEN INSTALLING RIZE KWIK-LOC CABLE ATTACHMENTS: to buildings or equipment careful consideration must be made to the attachment method and the material being attached to. It is the responsibility of the installer for the proper selection, installation and appropriateness of the attachment to the job specifications and any codes. Rize can give general guidance, but any questions regarding this should ultimately be directed to the project engineer of the job.

FOR DRY LOCATIONS ONLY

DO NOT USE IN CHLORINATED ATMOSPHERES SUCH AS POOLS AND NATATORIUM

GYMNASIUM INSTALLS MUST BE USING LOCKING CABLE LOCKS ONLY



SUGGESTED SPECIFICATION:

All ductwork and equipment shall be supported using wire rope cable terminated by Cable Locks. All Cable Locks shall have an Ultimate Breaking Strength (U.B.S.) of at least 5 times the published Working Load Limit (W.L.L.). Wire ropes shall be of the size and spaced per manufacturers printed specifications. Wire Rope and Cable Locks shall be as supplied by Rize Enterprises.

SPECIFICATION DATA

- 1) All wire rope supplied by Rize is statistically tested to minimum breaking strength.
- 2) Rize Suspension System has been submitted and tested to be an acceptable alternative to the duct hanger systems prescribed in SMACNA HVAC-DCS 2nd edition By SMACNA Testing & Research Institute.
- 3) All Working Load Ratings of Rize Kwik-Locs manufactured by Rize have been witnessed and verified by Independent Testing Labs.
- 4) Rize Kwik-Locs may be used in temperatures up to 300 degrees F.
- 5) Rize Kwik-Locs wedges are constructed of corrosion resistant sintered steel.
- 6) Rize Kwik-Loc springs are constructed of tempered stainless steel.

WIRE ROPE SPECIFICATION CARBON STEEL & GALVANIZED

Galvanized steel wire rope, supplied by Rize is manufactured to exacting standards and statistically tested to verify the breaking strength. Rize recommends only using wire rope supplied by Rize. The chart below outlines the specifications.

Wire Rope	Tolerance	Rope Construction
RWC4	+0.014/-0.007 in	7x7
RWC3	+0.012/-0.006 in	7x7
RWC2	+0.010/-0.005 in	7x7

APPLICABLE SMACNA STANDARD

4.2.11 Hanging System Selection

The selection of a hanging system should not be taken lightly not only because it involves a significant portion of the erection labor, but also because an inadequate hanging system can be disastrous. In any multiple hanging system, the failure of one hanger transfers that load to adjacent hangers. If one of these fail, an even greater load is transferred to the next. The result is a cascading failure in which an entire run of duct might fail.

There are many hanger alternatives, especially in the upper attachments. Besides structural adequacy, the contractor's choice of hanging system must also take into account the particulars of the building structure, the skills of the workmen, the availability of tooling, and the recommendations of the fastener manufacturer. Because of these variables, it is suggested that the hanging system be the contractor's choice, subject to the approval of the mechanical engineer.

Please see our Rize testing and warnings webpage
for the most detailed list of warnings:
<http://rizellc.com/techsupport-testing.html>

Rize Enterprises, LLC
PO Box 1311 Brentwood, NY 11717
Tel: 631-930-7532 Fax: 631-249-8976
www.rizellc.com




©2021 Rize Enterprises
Printed in USA 5/17/2021
ROZ00115

SUBMITTAL RECORD
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form

45° Eyelets & Cable Assembly

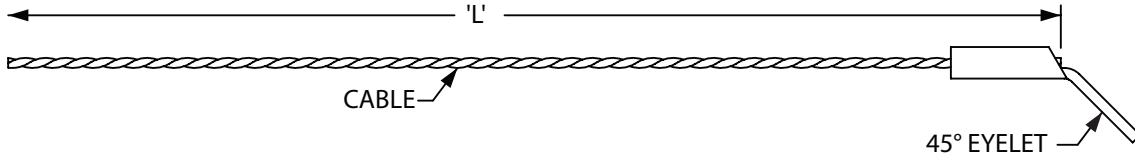

Ordering Information					
Item #	Code	Description	Quantity	Use With Kwik-Loc	Safe Working Load*
30141	4514RWC2-5	45 Degree 1/4" Eyelet x 5ft RWC2 Cable	10 Cables/Bag-10 Bags/Ctn	KL75	10-75 lbs. (5-34 kg)
30142	4514RWC2-10	45 Degree 1/4" Eyelet x 10ft RWC2 Cable	10 Cables/Bag-10 Bags/Ctn	KL75	10-75 lbs. (5-34 kg)
30145	4514RWC3-5	45 Degree 1/4" Eyelet x 5ft RWC3 Cable	10 Cables/Bag-10 Bags/Ctn	KL100	25-150 lbs. (12-68 kg)
30146	4514RWC3-10	45 Degree 1/4" Eyelet x 10ft RWC3 Cable	10 Cables/Bag-10 Bags/Ctn	KL100	25-150 lbs. (12-68 kg)
30143	4514RWC4-5	45 Degree 1/4" Eyelet x 5ft RWC4 Cable	10 Cables/Bag-10 Bags/Ctn	KL150	25-225 lbs. (12-102 kg)
30144	4514RWC4-10	45 Degree 1/4" Eyelet x 10ft RWC4 Cable	10 Cables/Bag-10 Bags/Ctn	KL150	25-225 lbs. (12-102 kg)
*Safe Working Loads are based on a 5:1 Safety Factor.					
Also available as a kit with the appropriate cable lock.					