

SUBMITTAL RECORD


JOB _____
LOCATION _____
SUBMITTED TO _____
SUBMITTAL PREPARED BY _____
APPROVED BY _____
DATE _____



Submittal Form Looped Cable

DESCRIPTION

The Looped Cable Assembly enhances the Rize suspension system by the addition of a pre-looped cable end. Once the wire rope is pulled around the anchor point and through the looped end of the cable, it is already secured at one end, saving time at the jobsite. The remaining wire rope "drop" is passed through a channel in the Rize Kwik-Loc. Then, the wire rope is either wrapped around the ductwork or inserted through a fastening point and back up into the second channel of the same cable lock. The locking teeth inside the cable lock engage the wire rope which secures the ductwork in place. **TO ENSURE MAXIMUM SAFETY, USE ONLY LOOPED WIRE ROPE SUPPLIED BY RIZE ENTERPRISES WITH KWIK-LOC CABLE LOCKS.**

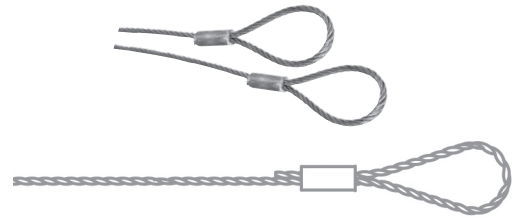

SUGGESTED SPECIFICATION:

All ductwork and equipment shall be supported using wire rope cable terminated by Cable Locks. All Cable Locks shall have an Ultimate Breaking Strength (U.B.S.) of at least 5 times the published Working Load Limit (W.L.L.). Wire ropes shall be of the size and spaced per manufacturers printed specifications. Wire Rope and Cable Locks shall be as supplied by Rize Enterprises, LLC.

For ordering information, see reverse side.

WARNINGS

ALWAYS CONFIRM ENGAGEMENT OF CABLE LOCK ON WIRE BEFORE APPLYING THE LOAD: By pushing the adjustment pin in the opposite direction of the arrows on the cable lock and then pulling the cable also in the opposite direction of the arrows on the cable lock.

PULL ADJUSTMENT PIN BACK AND PASS WIRE ROPE THROUGH RIZE CABLE LOCK: Failure to pull adjustment pin first may cause damage to serrated teeth and reduce holding capacity.

TO ENSURE HANGING SYSTEM INTEGRITY AND SAFETY: Use only Rize wire rope.

WORKING LOAD LIMIT (WLL) MUST FALL WITHIN THE STATED WORKING LOAD RANGE OF THE CABLE LOCK: Each product is load rated and incorporates a minimum safety factor of 5:1. This WLL takes into account the specification criteria of the Rize Cable Lock and the wire rope.

DO NOT USE ON COATED WIRE ROPE: It is important to maintain the metal to metal contact between the locking pawls in the Kwik-Loc and the wire rope.

SPRAY PAINTING: of the Rize Suspension Hanging System after installation is acceptable, at the installing contractor's discretion, if the installing contractor physically confirms engagement of each cable lock on the cable prior to and after painting, and in strict accordance with the Rize Installation Instructions. Brush painting is not acceptable. Do not paint Cable or Cable Lock prior to installation. Do not reposition Cable Lock after painting.

DO NOT APPLY LUBRICANT: to any part of the assembly as this will alter the surface nature of the wire rope and attract dirt and debris.

DO NOT USE FOR LIFTING: (Under Hook slings) This product is designed for static load applications only.

KEEP THE PRODUCT CLEAN AND FREE FROM DIRT: Any dirt should be removed from the product prior to assembly.

INSPECT PERIODICALLY: Upon inspection, discard and replace if worn, distorted, or damaged.

REMOVE DAMAGED WIRE ENDS: Using a designated pair of wire rope cutters prior to inserting into the Rize Kwik-Loc.

WHEN INSTALLING RIZE KWIK-LOC CABLE ATTACHMENTS: to buildings or equipment careful consideration must be made to the attachment method and the material being attached to. It is the responsibility of the installer for the proper selection, installation and appropriateness of the attachment to the job specifications and any codes. Rize can give general guidance, but any questions regarding this should ultimately be directed to the project engineer of the job.

FOR DRY LOCATIONS ONLY

DO NOT USE IN CHLORINATED ATMOSPHERES SUCH AS POOLS AND NATATORIUM

GYMNASIUM INSTALLS MUST BE USING LOCKING CABLE LOCKS ONLY

SPECIFICATION DATA

- 1) All wire rope supplied by Rize is statistically tested to minimum breaking strength.
- 2) Rize Suspension System has been submitted and tested to be an acceptable alternative to the duct hanger systems prescribed in SMACNA HVAC-DCS 2nd edition By SMACNA Testing & Research Institute.
- 3) All Working Load Ratings of Rize Kwik-Locs manufactured by Rize have been witnessed and verified by Independent Testing Labs.
- 4) Rize Kwik-Locs may be used in temperatures up to 300 degrees F.
- 5) Rize Kwik-Locs wedges are constructed of corrosion resistant sintered steel.
- 6) Rize Kwik-Loc springs are constructed of tempered stainless steel.

WIRE ROPE SPECIFICATION CARBON STEEL & GALVANIZED

Galvanized steel wire rope, supplied by Rize is manufactured to exacting standards and statistically tested to verify the breaking strength. Rize recommends only using wire rope supplied by Rize. The chart below outlines the specifications.

Wire Rope Size	Tolerance	Rope Construction	Min. Breaking Strength
RWC8	+5%/-0%	7x19	7000 lbs.
RWC6	+.018/-0.009 in	7x19	4200 lbs.
RWC4	+.014/-0.007 in	7x7	1700 lbs.
RWC3	+.012/-0.006 in	7x7	920 lbs.
RWC2	+.010/-0.005 in	7x7	480 lbs.
RWC1	+0.008/-0.00 in	7x7	270 lbs.

APPLICABLE SMACNA STANDARD

4.2.11 Hanging System Selection

The selection of a hanging system should not be taken lightly not only because it involves a significant portion of the erection labor, but also because an inadequate hanging system can be disastrous. In any multiple hanging system, the failure of one hanger transfers that load to adjacent hangers. If one of these fail, an even greater load is transferred to the next. The result is a cascading failure in which an entire run of duct might fail.

There are many hanger alternatives, especially in the upper attachments. Besides structural adequacy, the contractor's choice of hanging system must also take into account the particulars of the building structure, the skills of the worker, the availability of tooling, and the recommendations of the fastener manufacturer. Because of these variables, it is suggested that the hanging system be the contractor's choice, subject to the approval of the mechanical engineer.

Please see our Rize testing and warnings webpage for the most detailed list of warnings:
<http://rizellc.com/techsupport-testing.html>

Rize Enterprises, LLC

PO Box 1311 Brentwood, NY 11717

Tel: 631-930-7532 Fax: 631-249-8976

www.rizellc.com



©2021 Rize Enterprises
Printed in USA 5/17/2021
ROZ00130

SUBMITTAL RECORD

JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form
Looped Cable

Item #	Code	Description	For Use With Cable Lock	Safe Working Load*+	Packaging
Looped Cable Assemblies					
30195	RLC1-5	5ft x RWC1 Looped Cable	KL50	5-35 lbs.(3-10 kg)	10 bags of 10
30196	RLC1-10	10ft x RWC1 Looped Cable	KL50	5-35 lbs.(3-10 kg)	10 bags of 10
30197	RLC1-15	15ft x RWC1 Looped Cable	KL50	5-35 lbs.(3-10 kg)	10 bags of 10
30193	RLC1-20	20ft x RWC1 Looped Cable	KL50	5-35 lbs.(3-10 kg)	10 bags of 10
30198	RLC1-25	25ft x RWC1 Looped Cable	KL50	5-35 lbs.(3-10 kg)	10 bags of 10
30223	RLC2-5	5ft x RWC2 Looped Cable	KL75	10-75 lbs. (5-34 kg)	10 bags of 10
30224	RLC2-10	10ft x RWC2 Looped Cable	KL75	10-75 lbs. (5-34 kg)	10 bags of 10
30225	RLC2-15	15ft x RWC2 Looped Cable	KL75	10-75 lbs. (5-34 kg)	10 bags of 10
30227	RLC2-25	25ft x RWC2 Looped Cable	KL75	10-75 lbs. (5-34 kg)	5 bags of 10
30228	RLC3-5	5ft x RWC3 Looped Cable	KL100	25-150 lbs. (12-68 kg)	10 bags of 10
30229	RLC3-10	10ft x RWC3 Looped Cable	KL100	25-150 lbs. (12-68 kg)	10 bags of 10
30230	RLC3-15	15ft x RWC3 Looped Cable	KL100	25-150 lbs. (12-68 kg)	10 bags of 10
30232	RLC3-300	25ft x RWC3 Looped Cable	KL100	25-150 lbs. (12-68 kg)	10 bags of 10
30233	RLC4-5	5ft x RWC4 Looped Cable	KL150	25-250 lbs. (12-114 kg)	10 bags of 10
30234	RLC4-10	10ft x RWC4 Looped Cable	KL150	25-250 lbs. (12-114 kg)	10 bags of 10
30235	RLC4-15	15ft x RWC4 Looped Cable	KL150	25-250 lbs. (12-114 kg)	10 bags of 10
30237	RLC4-25	25ft x RWC4 Looped Cable	KL150	25-250 lbs. (12-114 kg)	5 bags of 10
Looped Cable Kits					
30199	RWC2L5K	(2) RWC2 x 5ft. Cable Looped & (2) KL75 Kit	KL75	10-75 lbs. (5-34 kg)	10 bags of 10
30260	RWC2L10K	(2) RWC2 x 10ft. Cable Looped & (2) KL75 Kit	KL75	10-75 lbs. (5-34 kg)	10 bags of 10
30261	RWC2L15K	(2) RWC2 x 15ft. Cable Looped & (2) KL75 Kit	KL75	10-75 lbs. (5-34 kg)	10 bags of 10
30025	RWC2L20K	(2) RWC2 x 20ft. Cable Looped & (2) KL75 kit	KL75	10-75 lbs. (5-34 kg)	5 bags of 10
30172	RWC2L25K	(2) RWC2 x 25ft. Cable Looped & (2) KL75 kit	KL75	10-75 lbs. (5-34 kg)	5 bags of 10
30128	RWC3L5K	(2) RWC3 x 5ft. Loop Cable & (2) KL100 Kit	KL100	25-150 lbs. (12-68 kg)	10 bags of 10
30206	RWC1L11K	(2) RWC1 x 11ft. Cable Looped & (2) KL50 Kit	KL100	25-150 lbs. (12-68 kg)	10 bags of 10
30130	RWC4L5K	(2) RWC4 x 5ft. Loop Cable & (2) KL150 Kit	KL150	25-250 lbs. (12-114 kg)	10 bags of 10
30126	RWC4L10K	(2) RWC4 x 10ft. Loop Cable & (2) KL150 Kit	KL150	25-250 lbs. (12-114 kg)	10 bags of 10
30131	RWC4L15K	(2) RWC4 x 15ft. Loop Cable & (2) KL150 Kit	KL150	25-250 lbs. (12-114 kg)	10 bags of 10
30132	RWC4L25K	(2) RWC4 x 25ft. Loop Cable & (2) KL150 Kit	KL150	25-250 lbs. (12-114 kg)	5 bags of 10
Single Looped Cable Kits					
31027	SRWC2L05K	(1) RWC2 x 5ft. Cable Looped & (1) KL75 Single Kit	KL75	10-75 lbs. (5-34 kg)	10 bags of 10
*Safe Working Loads are based on a 5:1 Safety Factor.					
+Hanging at angles will reduce the Safe Working Loads. Please see our 'Effects of Hanging at Angles' table on our website at: http://rizellc.com/techsupport-testing.html					
Also available in Stainless Steel.					

Please see our Rize testing and warnings webpage for the most detailed list of warnings:
<http://rizellc.com/techsupport-testing.html>